





| Body material Upper body cover: ABS VO Lower body cover: varnished steel | TEMPERATURE = | | | |
|---|---------------|--------------|--------------------|---------|
| Boiler material Stainless steel AISI 304 (with interchangeable heating element) | New digital c | ontrol panel | - | |
| Boiler volume 1,5 L | | | | |
| Water tank 3 L | 6 bar | | | |
| Maximum output 2,45 kW | 8 | | | |
| Boiler output 2,4 KW | bar | | | |
| Steam production 64 g/min + 3,8 Kg/h | | | Optional trolleys: | |
| Power supply I ∼ 230 V - 50/60 Hz | | | | |
| Steam T° 6 bar: 165° ⊂ - 8 bar: 174° ⊂ | | | | |
| Power cord 5 m | | ARENA | ARENA PLUS | ANTARES |
| Weight 4 Kg | | | | |
| Packaging 50×30×42 cm | | | | |

Single-phase steam generator for usage in the professional sector, with an ABS body, unlimited steam autonomy thanks to the automatic refilling system with an internal water tank (electromechanical water level control system inside the boiler – True TempTM). For the 8bar version you have the possibility to inject hot water together with steam. The steam generator's front panel is equipped with an electric console with commands for a timer, a thermometer and a pressure gauge; the digital display will advise the user about the necessity to proceed with the boiler maintenance.



TOOLS

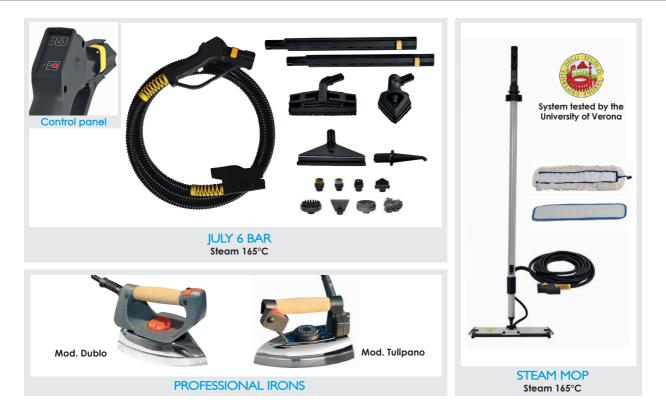

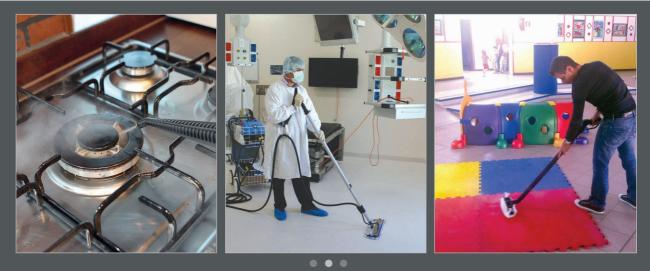

🖆 Via dei Sassi 1/a, 37026 Pescantina - Verona, Italy 🐧 Tel. +39 045 67 67 252 - Fax +39 045 67 03 631 🖂 info@tecnovap.com